

BIRCH, STEWART, KOLASCH & BIRCH, LLP

INTELLECTUAL PROPERTY LAW  
8110 GATEHOUSE ROAD  
SUITE 500 EAST  
FALLS CHURCH, VA 22042-1210  
U S A  
(703) 205-8000

FAX. (703) 205-8050  
(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com  
web: http://www.bskb.com

CALIFORNIA OFFICE:  
COSTA MESA, CALIFORNIA

THOMAS S. AUCHTERLOFF  
JAMES T. ELLER, JR.  
SCOTT L. LOWE  
MARK J. NUEL, Ph.D.  
D. RICHARD ANDERSON  
PAUL C. LEWIS  
MARK W. MILSTEAD\*  
RICHARD J. GALLAGHER  
JAYNE M. SAYDAH\*

REG. PATENT AGENTS:  
FREDERICK R. HANDREN  
MARYANNE ARMSTRONG, Ph.D.  
MAKI HATSUMI  
MIKE S. RYU  
CRAIG A. McROBBIE  
GARTH M. DAHLEN, Ph.D.  
LAURA C. LUTZ  
ROBERT E. GOOZNER, Ph.D.  
HYUNG N. SOHN  
MATTHEW J. LATTIG  
ALAN PEDERSEN-GILES  
C. KEITH MONTGOMERY  
TIMOTHY R. WYCKOFF  
KRISTIL L. RUPERT, Ph.D.  
LARRY J. HUME  
ALBERT LEE  
HARAY A. SAYADIAN, Ph.D.

TERRELL C. BIRCH  
RAYMOND C. STEWART  
JOSEPH A. KOLASCH  
JAMES M. SLATTERY  
BERNARD L. SWEENEY\*  
MICHAEL K. MUTTER  
CHARLES GORENSTEIN  
GERALD M. MURPHY, JR.  
LEONARD R. SVENSSON  
TERRY L. CLARK  
ANDREW D. MEIKLE  
MARC S. WEINER  
JOE MCKINNEY MUNCY  
ROBERT J. KENNEY  
DONALD J. DALEY  
JOHN W. BAILEY  
JOHN A. CASTELLANO, III  
GARY D. YACURA

OF COUNSEL:  
HERBERT M. BIRCH (1905-1996)  
ELLIOT A. GOLDBERG\*  
WILLIAM L. GATES\*  
EDWARD H. VALANCE  
RUPERT J. BRADY (RET.)\*  
F. PRINCE BUTLER  
FRED S. WHISENHUNT

\*ADMITTED TO A BAR OTHER THAN VA

Date: October 19, 2000

Docket No.: 1560-0349P

Assistant Commissioner for Patents  
Box PATENT APPLICATION  
Washington, D.C. 20231

Sir:

As authorized by the inventor(s), transmitted herewith for filing  
is a patent application applied for on behalf of the inventor(s)  
according to the provisions of 37 CFR 1.41(c).

Inventor(s): SHIOMI, Kakuichi  
HIROSE, Shozo

For: APPARATUS FOR DETECTING FATIGUE AND DOZE BY VOICE, AND  
RECORDING MEDIUM

Enclosed are:

- ☒ A specification consisting of 30 pages
- ☒ 5 sheet(s) of formal drawings
- ☐ Certified copy of Priority Document(s)
- ☒ Executed Declaration in accordance with 37 CFR 1.64 will follow
- ☐ A verified statement to establish small entity status under 37  
CFR 1.9 and 37 CFR 1.27
- ☐ Preliminary Amendment
- ☒ Information Sheet
- ☒ Information Disclosure Statement, PTO-1449 with reference(s)

Other \_\_\_\_\_

The filing fee has been calculated as shown below:

LARGE ENTITY				SMALL ENTITY			
FOR	NO. FILED	NO. EXTRA	RATE FEE		RATE FEE		
BASIC FEE	***** ***** *****	***** ***** *****	***** ***** \$710.00 *****	or	**** **** \$355.00 ****		
TOTAL CLAIMS	11 - 20 =	0	x18 =\$ 0.00	or	x 9 = \$	0.00	
INDEPENDENT	3 - 3 =	0	x80 =\$ 0.00	or	x 40 = \$	0.00	
MULTIPLE DEPENDENT CLAIM PRESENTED <u>no</u>			+270 = \$ 0.00	or	+135 = \$	0.00	
TOTAL \$ 710.00					TOTAL \$ 0.00		

X The application transmitted herewith is filed in accordance with 37 CFR 1.41(c). The undersigned has been authorized by the inventor(s) to file the present application. The original duly executed patent application together with the surcharge will be forwarded in due course.

X A check in the amount of \$ ~~710.00~~ to cover the filing fee and recording fee (if applicable) is enclosed.

\_\_\_\_\_ The Government Filing Fee will be paid at the time of completion of the filing requirement.

\_\_\_\_\_ Please charge Deposit Account No. 02-2448 in the amount of \$ \_\_\_\_\_. A triplicate copy of this transmittal form is enclosed.

X Send Correspondence to: BIRCH, STEWART, KOLASCH & BIRCH, LLP  
P. O. Box 747  
Falls Church, Virginia 22040-0747

006707 3276900

TITLE OF THE INVENTION  
APPARATUS FOR DETECTING FATIGUE AND DOZE BY VOICE,  
AND RECORDING MEDIUM

5 BACKGROUND OF THE INVENTION

The present invention relates to an apparatus for detecting a fatigue level of a person and detecting whether the person is in a drowsy state and in a state of doze (hereinafter these states are both referred to as a "dozing state") by analyzing voice, more specifically the person's speaking voice, and also relates to a recording medium on which a program for realizing such an apparatus with a general-purpose computer is recorded.

There have been instances of serious accidents caused by airplane pilots, air traffic controllers or drivers of public transport systems, such as trains, taxies, tracks and buses, who were dozing or in an extremely fatigued state, and there have also been many instances of various accidents, though they did not develop into serious accidents, in which such a doze or extremely fatigued state was a contributing factor. Conventionally, for example, whether a pilot, air traffic controller or driver is in such a state is judged by his/her superior's observation during the morning roll call, but the observation by human's eyes has its limitation and there is also a high possibility that his/her state will change thereafter.

25 In resent years, however, not only in the aviation field,

but also in the public transport systems as mentioned above, it is possible to readily communicate with a driver by radio communication and to presume the driver's fatigue level to a certain extent from the tone of his/her voice during the communication.

5 Moreover, there is such a system that it regards no communications over a certain period of time as a high possibility of occurrence of some abnormality, and provides a warning. However, it is difficult in practice for a person to judge another person's fatigue level or judge accurately whether another person is in a dozing  
10 state by listening the speaking voice of another person.

In view of such circumstances, nowadays, for instance, there have been thoughts that the physical conditions, for example, the states of pulse and pupil, of a driver are detected with a sensor and transmitted for analysis by radio with the use of radio traffic  
15 facilities introduced in various public transport systems as mentioned above.

For example, Japanese Patent Application Laid-Open No. 9-308614 (1997) discloses a technique of knowing a person's mental and physical conditions from the pulse wave and electrocardiogram,  
20 and Japanese Patent Application Laid-Open No. 7-117595 (1995) discloses a technique of detecting a doze from the pulse wave. Further, in resent years, chaos analysis has been often used as a technique of analyzing the obtained data. For instance, Japanese Patent Application Laid-Open No. 4-208136 (1992) discloses a  
25 technique of detecting a person's health level, fatigue level and

state of doze by chaos analysis of the person's pulse wave. In addition, Japanese Patent Application Laid-Open No. 7-116119 (1995) discloses a technique of judging a person's health level by chaos analysis of the area of pupil and the refractive index of the lens of the person's eye.

However, with the techniques based on the pulse wave, electrocardiogram, the area of pupil and the refractive index of the lens as mentioned above, it is necessary to attach some sensor to a person as a subject and to send the information obtained by the sensor by radio or cable, or to analyze the information on the spot by an analyzer. Moreover, in the case where a sensor is attached to a person's body, the person may fall into unusual mental and physical conditions due to the stress caused by the attachment of the sensor. In this case, the information about the person in normal conditions, which is to be used as criteria for judgment, can not be obtained, and thus there is a fear that accurate detection and judgment are not performed.

By the way, the inventors of this application calculated the Lyapunov exponents by chaos analysis of voices uttered by a person, compared the calculation results in a time series, and gained knowledge that the Lyapunov exponents are higher when the person's fatigue level is high or when the person falls into a doze. Accordingly, by calculating the Lyapunov exponents of voices uttered by a person at different points of time and comparing them, it is possible to detect the person's fatigue level and/or dozing

state.

### BRIEF SUMMARY OF THE INVENTION

0969126-101900  
The present invention was made in view of such circumstances,  
5 and its object is to provide an apparatus for detecting fatigue and  
doze by voice, which is capable of making accurate judgment by  
performing chaos analysis of voice uttered during communications  
by a person having an occupation in which the person nowadays  
performs radio communications daily, such as a driver of various  
10 public transport systems and of course an airplane pilot and an air  
traffic controller, and thereby readily obtaining information  
about the person in normal conditions, without attaching to the  
person as a subject a special sensor in addition to a device such  
as a headset which has been conventionally used to conduct his/her  
15 task.

Another object is to provide an apparatus for detecting  
fatigue and doze by voice, which is capable of making accurate  
detection irrespective of the languages or words spoken by a  
subject's voice.

20 A further object of the present invention is to provide a  
recording medium on which a program capable of realizing an  
apparatus as mentioned above with a general-purpose computer is  
recorded.

An apparatus of the first invention for detecting fatigue  
25 and doze by voice characterized by comprising a controller capable

of performing the following operations: calculating Lyapunov exponents by chaos analysis of digital data of voices; and judging a fatigue level and/or a dozing state by comparing the calculated Lyapunov exponents of voices uttered at different points of time.

5       An apparatus of the second invention for detecting fatigue and doze by voice characterized by further comprising, in addition to the first invention, a microphone for inputting a voice as a sound signal; and an analog/digital converting device for converting the sound signal inputted to the microphone into digital data.

10       An apparatus for detecting fatigue and doze by voice char of the third invention characterized in that, in the first invention, the calculation of the Lyapunov exponents by the controller is performed by chaos analysis of digital data of sound signals recorded on a recording medium.

15       An apparatus of the fourth invention for detecting fatigue and doze by voice characterized in that, in the first invention, the controller is further capable of performing the operation of removing a voiceless part from the digital data prior to the calculation of the Lyapunov exponents.

20       An apparatus of the fifth invention for detecting fatigue and doze by voice characterized in that, in the fourth invention, the controller is further capable of performing the operation of generating digital data of a predetermined length by data based on the digital data, in the case where a data length of the digital  
25 data after removing the voiceless part is less than the

predetermined length, prior to the calculation of the Lyapunov exponents.

An apparatus of the sixth invention for detecting fatigue and doze by voice characterized by further comprising, in addition  
5 to the first invention, a storing device for storing calculation results obtained by the operation of calculating the Lyapunov exponents, and wherein the controller is coupled to the storing device and further capable of performing the operation of comparing the Lyapunov exponents of voices uttered at different points of time,  
10 based on the calculation results which were obtained in advance by the operation of calculating the Lyapunov exponents and are stored in the storing device, during the judging operation.

A computer readable recording medium of the seventh invention on which a program for causing a computer to detect a  
15 fatigue level and/or a dozing state by analysis of voices uttered at different points of time is recorded, characterized by including: program code means for causing a computer to calculate Lyapunov exponents by chaos analysis of digital data of voices; and program code means for causing a computer to judge a fatigue level  
20 and/or a dozing state by comparing the Lyapunov exponents of the voices uttered at different points of time.

A recording medium of the eighth invention characterized by further including, in addition to the seventh invention, program code means for causing a computer to remove a voiceless part from  
25 loaded digital data.



A recording medium of the ninth invention characterized by further including, in addition to the seventh invention, program code means for causing a computer to generate digital data of a predetermined length from data based on the loaded digital data,  
5 in the case where a data length after removing the voiceless part from the loaded digital data is less than the predetermined length.

A recording medium of the tenth invention characterized by further including, in addition to the seventh invention; program code means for causing a computer to store calculation results of  
10 the Lyapunov exponents; program code means for causing a computer to read the stored Lyapunov exponents; and program code means for causing a computer to compare the read Lyapunov exponents of voices uttered at different points of time.

A computer readable recording medium of the eleventh  
15 invention on which a program for causing a computer to detect a fatigue level and/or a dozing state by analysis of voices uttered at different points of time is recorded, characterized by including: program code means for causing a computer to remove a voiceless part from digital data of voices; program code means for  
20 causing a computer to generate digital data of a predetermined length from data based on loaded digital data, in the case where a data length after removing a voiceless part from the loaded digital data is less than the predetermined length; program code means for causing a computer to give the loaded data to a chaos  
25 analyzing process for calculating Lyapunov exponents by chaos

analysis; program code means for causing a computer to store calculation results of the Lyapunov exponents calculated by the chaos analyzing process; program code means for causing a computer to read the stored Lyapunov exponents; and program code means for causing the computer to judge a fatigue level and/or a dozing state by comparing the read Lyapunov exponents of voices uttered at different points of time.

According to the first and second inventions, since the Lyapunov exponent is calculated by chaos analysis of the digital data of an inputted voice, it is possible to judge a person's fatigue level and/or dozing state by comparing the Lyapunov exponents calculated from voices uttered by the person at different points of time. This will be explained more specifically below.

FIG. 1 is a graph showing the results of an experiment performed by the inventors of this application, and the experiment was carried out under the following conditions. A phrase of about two to three seconds was sampled from a voice uttered by one person as the subject, continuously for 40 minutes at a rate of about 10 data per minute, and the Lyapunov exponents  $\lambda$  of the respective data were calculated. Note that in the graph of FIG. 1, moving averages of the data in the past five minutes are shown by relative values with respect to the value (416) of the Lyapunov exponent  $\lambda$  at the start time of the experiment as "1.00". The subject self-reported at the start time of the experiment that he/she did not feel drowsy nor fatigued, but self-reported after the passage of about 29

minutes from the start time of the experiment that he/she felt drowsy.

It would be appreciated from the results of the experiment that the Lyapunov exponent  $\lambda$  increased to about 1.17 in the relative value at the time when about 29 minutes passed from the start time of the experiment, at which the subject self-reported that he/she felt drowsy. More specifically, the Lyapunov exponent  $\lambda$  did not show a significant change for about 10 minutes from the start time of the experiment, but the Lyapunov exponent  $\lambda$  started to show a significant increasing tendency from a time in the vicinity of the passage of 10 minutes and the subject self-reported that he/she felt drowsy after the relative value became more than about 1.15 at a time in the vicinity of the passage of 23 minutes.

The inventors of this application gained knowledge from the above-mentioned results of the experiment that the subject can be judged as in a state in which the subject's fatigue accumulated to a certain extent or in a dozing state when the Lyapunov exponent becomes more than about 1.15 in the relative value which is "1.00" at the start time of the experiment and this state continues for a while thereafter. Moreover, the inventors of this application gained knowledge that the subject can be judged as in a state in which the subject's fatigue accumulated to a certain extent or in a dozing state when the increasing rate of the Lyapunov exponent reaches or exceeds a certain value.

According to the second invention, since the voice of a

person as a subject is inputted from a microphone and converted into digital data, if, for example, a microphone of a headset which is used daily by, particularly, a airplane pilot, air traffic controller, a driver of public transport systems and so on is used, 5 the person as the subject of detection does not have to bear any burden.

According to the third invention, since the Lyapunov exponent calculating means performs chaos analysis of the digital data of a sound signal recorded on a recording medium, in the case 10 where the voice is kept recorded on the recording medium, it can be analyzed afterward.

According to the fourth and eighth inventions, a voiceless part is removed from the digital data and then only the data necessary for analysis is inputted.

15 According to the fifth and ninth inventions, even when the data length after removing a voiceless part from the digital data is less than a predetermined length necessary for analysis, data with a data length necessary and sufficient for analysis is inputted.

20 According to the sixth and tenth inventions, by storing the Lyapunov exponents obtained in a time series from the same person in storing means, it is possible to detect the person's state of fatigue and/or dozing which changes with the passage of time. Moreover, by storing the Lyapunov exponents, which were obtained 25 as the result of analysis of the voices of a plurality of persons

in normal conditions in advance, as the reference values of the respective persons in the storing means, it is possible to perform prompt and accurate detection on a number of persons as the subjects.

5           According to the eleventh invention, when a program for performing only chaos analysis is separately prepared, the use of the program makes it possible to realize an apparatus for detecting fatigue and doze by voice of the present invention with a general-purpose computer.

10           The above and further objects and features of the invention will more fully be apparent from the following detailed description with accompanying drawings.

#### BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

15           FIG. 1 is a graph of the time-series data of the Lyapunov exponents showing the principle of an apparatus for detecting fatigue and doze by voice of the present invention;

            FIG. 2 is a schematic drawing showing an example of the entire constitution of an apparatus for detecting fatigue and doze by voice  
20 of the present invention, which is realized by the use of a personal computer;

            FIG. 3 is a block diagram illustrating an example of the internal constitution of the personal computer;

            FIG. 4 is a schematic drawing showing the contents of a  
25 program recorded on a flexible disk as one example of a recording

medium of the present invention; and

FIG. 5 is a flow chart showing the operation procedure of an apparatus for detecting fatigue and doze by voice of the present invention.

5

#### DETAILED DESCRIPTION OF THE INVENTION

The present invention will be described in detail below with reference to the drawings illustrating an embodiment thereof. FIG. 2 is a schematic drawing showing an example of the entire constitution of an apparatus for detecting fatigue and doze by voice according to the present invention (hereinafter referred to as the "apparatus of the present invention"), which is realized by the use of a computer.

In FIG. 2, reference numeral 1 represents a personal computer provided with a flexible disk drive (FDD) 11 and a CD-ROM drive (CDD) 12 for reading the recorded contents (program codes) from a flexible disk 11M or CD-ROM 12M on which a program PG for detecting fatigue and doze (hereinafter referred to as the "doze detecting program") is recorded. However, needless to say, it is also possible to use various types of recording media other than the flexible disk 11M and CD-ROM 12M.

The personal computer 1 also includes therein a hard disk drive (HDD) 13 as non-volatile storing means which stores the respective program codes of the doze detecting program PG read from the above-mentioned flexible disk 11M or CD-ROM 12M. Besides, the

doze detecting program PG includes a chaos analyzing program PGC. This chaos analyzing program PGC is a program for calculating the Lyapunov exponent by chaos analysis of the digital data of a voice loaded by the doze detecting program PG.

5           Moreover, a microphone 5 and a communication device 31 are directly connected to the personal computer 1. In addition, a CRT display, a keyboard and mouse functioning as inputting means and a pointing device, etc. are connected to the personal computer 1. Further, a headset 5H including a headphone 5P and a microphone 5M  
10 is connected to the communication device 31 by cable or radio communication.

          Incidentally, the microphone 5 is used in such a case where the voices of a number of persons in normal conditions are sampled in advance. Besides, the microphone 5M of the headset 5H is worn  
15 by a person as a subject (hereinafter referred to as the "subject") of detection of a fatigue level or a dozing state by the apparatus of the present invention in normal working conditions, and is used for capturing the voice of the person wearing the headset 5H as a sound signal in real time.

20           Furthermore, a voice reproducing device, for example, a tape recorder 6, capable of recording sound signals on a recording medium and reproducing and outputting the sound signals is connectable to the personal computer 1. This tape recorder 6 is used when  
analyzing the sound signals recorded on an audio tape as the  
25 recording medium afterward for some reasons by the apparatus of the

present invention.

FIG. 3 is a block diagram showing an example of the internal constitution of the personal computer 1. Connected to the inside of the personal computer 1 are a CPU 10 as a main part, an I/O port 14, a RAM 18 and ROM 19 as storing means, an A/D converter 30 for converting an analog input signal into digital data, etc., in addition to the above-mentioned FDD 11, CDD 12, HDD 13 connected to a bus 20. Besides, connected to the outside of the personal computer 1 are the microphone 5, tape recorder 6 and communication device 31 via the above-mentioned A/D converter 30, and the keyboard and mouse via the I/O port 14. Further, the communication device 31 is connected to the above-mentioned headset 5H by radio or cable communication.

The program codes of the doze detecting program PG read from the flexible disk 11M by the FDD 11 or from the CD-ROM 12M by the CDD 12 are, for example, written and once stored in the HDD 13. When executing the doze detecting program PG, these program codes are read from the HDD 13 and transferred and stored into the RAM 18. However, it is also possible to execute the doze detecting program PG by reading the program codes of the doze detecting program PG from the FDD 11 or CDD 12 and transferring and storing them directly into the RAM 18.

In the case where the apparatus of the present invention is realized by such a personal computer 1, the microphone 5 and the microphone 5M of the headset 5H constitute voice inputting means



together with the A/D converter 30 serving as analog/digital  
 converting means, and the CPU 10 functions as Lyapunov exponent  
 calculating means for calculating the Lyapunov exponents by  
 performing chaos analysis of the digital data provided by the A/D  
 5 converter 30, according to the chaos analyzing program PGC stored  
 in the HDD 13, and also functions as judging means for judging a  
 fatigue level and/or a dozing state from the calculation results.

Moreover, the CPU 10 functions as means for removing a  
 voiceless part from the digital data provided by the A/D converter  
 10 30. Further, if the data length of the digital data after removing  
 a voiceless part is less than a predetermined length, the CPU 10  
 also functions as means for generating digital data of the  
 predetermined length by, for example, repeating the above digital  
 data.

15 In addition, the HDD 13 functions as storing means for  
 storing the calculation result of the Lyapunov exponent calculated  
 by the CPU 10 as the Lyapunov exponent calculating means. Besides,  
 it is, of course, possible to use the RAM 18 as storing means for  
 storing the calculation result of the Lyapunov exponent, in place  
 20 of the HDD 13 as the non-volatile storing means.

FIG. 4 is a schematic drawing showing the contents of the  
 doze detecting program PG recorded on the flexible disk 11M as one  
 example of a recording medium of the present invention.

Recorded on the flexible disk 11M shown in FIG. 4 are the  
 25 following program codes that constitute the doze detecting program

PG for causing a computer to detect a person's fatigue level and/or  
dozing state by analyzing voices uttered by the same person at  
different points of time: namely, a program code (PC13) for causing  
the computer to remove a voiceless part from digital data; a program  
5 code (PC14) for causing the computer to generate data, if necessary,  
specifically, in the case where the data length of the digital data  
after removing the voiceless part is less than a predetermined  
length; a program code (PC15) of the chaos analyzing program PGC  
for causing the computer to calculate the Lyapunov exponents by  
10 chaos analysis of the digital data; a program code (PC16) for  
causing the computer to store the calculation results of the  
Lyapunov exponents in the HDD 13 or RAM 18; a program code (PC17)  
for causing the computer to read the Lyapunov exponents stored in  
the HDD 13 or RAM 18; a program code (PC18) for causing the computer  
15 to judge a fatigue level and/or a dozing state by comparing the  
Lyapunov exponents read from the HDD 13 or RAM 18; and a program  
code (PC19) for causing the computer to give an alarm according to  
the result of the judgment.

Referring to the flow chart shown in FIG. 5, the following  
20 description will explain an operation of the apparatus of the  
present invention which is realized by loading into the FDD 11 the  
flexible disk 11M as the recording medium on which the doze  
detecting program PG including the chaos analyzing program PGC as  
mentioned above is recorded and thereby installing the recorded  
25 doze detecting program PG in the personal computer 1.

At first, a voice of a person as the subject of a detection of a fatigue level or dozing state is captured by the apparatus of the present invention to obtain a sound signal (step S11). More specifically, the sound signal is inputted via the communication  
5 device 31, for example, the dispatching center of taxies, by inputting the voice from the microphone 5M of the headset 5H into which the subject inputs his/her voice directly.

At this time, however, the input of the voice is not necessarily performed by capturing the voice of the subject in real  
10 time, and may be performed by reproducing and inputting the sound signal recorded on the recording medium by a voice recorder of various types, for example, the tape recorder 6, or by inputting the sound signal through the microphone 5 and storing it in advance.

Next, when the inputted sound signal is an analog signal,  
15 it is converted into a digital signal (step S12). More specifically, the A/D converter 30 samples the analog sound signal inputted through the microphone 5M into digital data at a sampling rate of about 10 kHz so that the sound signal can be processed by the computer.

20 Thereafter, pre-processing is performed. In this pre-processing, a process for removing a voiceless part from the digital data of the sound signal obtained by the A/D converter 30 is performed (step S13) and, in the case where the resultant digital data is less than a predetermined length (for example, a data length  
25 equivalent to one second) necessary for calculating the

later-described Lyapunov exponent, a process for generating data is further performed (step S14). More specifically, this data generation process is a process performed when the data length of the digital data after removing the voiceless part is less than the  
5 predetermined length so as to generate data of the predetermined length by repeating the digital data a plurality of times.

Besides, as the pre-processing performed in steps S13 and S14, it is possible to perform another process, for example, a process for removing the consonant components by removing the  
10 high-frequency components by the Fourier transform or moving-average method.

Next, the Lyapunov exponents are calculated (step S15). The processing performed in step S15 calculates the Lyapunov exponents for chaos analysis of the data obtained by the pre-processing  
15 performed in steps S13 and S14. More specifically, the sound signal is four- to seven-dimensionally padded to generate an attractor. In this case, an appropriate padding delay time is not more than 10 ms, and more preferably about 1 ms. Moreover, for the evolution time necessary for calculating the Lyapunov exponents,  
20 a value equivalent to the delay time is given. Besides, in step S15, since the Lyapunov exponents are calculated substantially in real time, the data of the calculation results is suitably accumulated in the storing means, for example, in the HDD 13 (step S16).

25 However, it takes an extremely long time to precisely

calculate the Lyapunov exponents. In this embodiment, therefore, the real time processing is substantially achieved by using an approximate calculating technique developed by "Sano and Sawada". Furthermore, in this embodiment, "SCATplus" available from Computer Convenience Inc. is used as software for performing this chaos analysis.

In the manner mentioned above, the calculation results of the Lyapunov exponents are sequentially accumulated in the HDD 13, and the past calculation results accumulated in the HDD 13 are read from the HDD 13 in suitable timing (step S17), and comparison and judgment are performed (step S18). Further, in this embodiment, while the calculated Lyapunov exponent is once stored in the HDD 13, it is also possible to store the Lyapunov exponent temporarily in the RAM 18 whenever the Lyapunov exponent is newly calculated and to compare it with the Lyapunov exponents which were calculated in the past and have been stored temporarily in the RAM 18.

Accordingly, in the case where time-series measurement is performed on the same subject, when the Lyapunov exponent shows a significant increasing tendency or when the Lyapunov exponent increases to about 1.15 in the relative value after the measuring start time, the apparatus of the present invention judges at that time that the subject's fatigue has accumulated to a certain extent or the subject has fallen into a dozing state. More specifically, since the calculation results in step S15 mentioned above are accumulated, for example, in the HDD 13, it is possible to detect

whether the subject is fatigued, or in a dozing state, by comparing these time-series data.

Next, the result of the judgment in step S18 mentioned above is displayed on display means, for example, a CRT display, and an  
5 alarm is given to the subject directly or a manager, if necessary (step S19). This alarm may be given as a warning displayed on the CRT display of the personal computer, or may be given by sounding a bell or buzzer in close proximity to the subject or by calling attention by voice.

10 Moreover, in the apparatus of the present invention, since the calculation results of the Lyapunov exponents calculated in step S15 can be stored on the hard disk 13 as the non-volatile storing means beforehand, it is possible to capture the voices of a number of persons as the subjects in normal conditions as their  
15 reference values by the microphone 5 in advance. In such a case, therefore, immediately after starting the input of a current voice of a certain person, the relative value of the Lyapunov exponent with respect to that in normal conditions stored in the HDD 13 in step S18 can be calculated. It is thus possible to judge the  
20 current state of that person from the calculation result.

When the apparatus of the present invention is realized with the personal computer 1 in the manner mentioned above, the means for removing a voiceless part from digital data, the means for generating digital data of a predetermined length if the data length  
25 after removing the voiceless part from the digital data is less than

the predetermined length, the Lyapunov exponent calculating means and the judging means are realized as software functions executed as steps S13, S14, S15 and S18, respectively, by the CPU 10 according to the doze detecting program PG installed on the hard disk 13.

5           Incidentally, while the above-described embodiment illustrates an example of the apparatus of the present invention realized by installing the doze detecting program PG recorded on the recording medium in the personal computer 1, needless to say, it is of course possible to realize the apparatus of the present  
10   invention as a dedicated apparatus, or to realize the functions, which are realized as software by the doze detecting program PG and chaos analyzing program PGC, by dedicated hardware.

          Moreover, it is possible to record the Lyapunov exponents of individuals in normal conditions on ID cards or the like and to  
15   load the Lyapunov exponents in the personal computer 1 by a suitable reading device so as to use them as the reference values similar to those mentioned above.

          Furthermore, while the above-described embodiment explains an example in which a voice is captured from the subject in real  
20   time to detect the subject's state, if the voice is still recorded on a recording medium, it is possible to analyze the voice afterward by reproducing the sound signal recorded on the recording medium with the use of a tape recorder or the like. Accordingly, for  
example, when an accident occurred, if the communication record  
25   over a certain period of time until the occurrence of the accident

is present, there is a fear that the cause of the accident is found by reproducing the sound signals from a recording medium on which the communication record is recorded with a reproduction device such as the tape recorder 6 and analyzing them with the apparatus  
5 of the present invention.

Additionally, while the above-described embodiment illustrates an example in which the chaos analyzing program PGC is included in the doze detecting program PG, it is also possible to adopt a constitution in which chaos analysis is performed as a  
10 separate process because chaos analysis is an extremely complex process and requires an enormous amount of calculation.

As described above, according to the apparatus for detecting fatigue and doze by voice of the present invention, since voices uttered at different points of time are converted into digital data  
15 and subjected to chaos analysis so as to detect a fatigue level and/or a dozing state based on the Lyapunov exponents obtained as the results of the analysis, it is possible to detect a fatigue level and/or a dozing state without giving an excess of burden or an excess of stress to a person as the subject.

Moreover, when the voice inputting means is constructed by  
20 a microphone for inputting a voice as a sound signal and analog/digital converting means for converting a sound signal inputted to this microphone into digital data, since the voice of a person as the subject can be inputted through an ordinary  
25 microphone, it is possible to use a microphone belonging to headsets



which are used daily by airplane pilots, air traffic controllers, drivers of public transport systems and so on, thereby requiring no extra sensors.

Furthermore, in the case where the Lyapunov exponent  
5 calculating means performs chaos analysis of the digital data of  
a sound signal recorded on a recording medium, it is possible to  
analyze the sound signal recorded on the recording medium afterward.  
Therefore, for example, when an accident occurred, it is possible  
to use the sound signals to investigate the cause of the accident  
10 by reproducing the record of communications with the voice of the  
party to the accident until the occurrence of the accident, stored  
on the recording medium.

Besides, in the case where a voiceless part has been removed  
from the digital data and the data length of the resultant data is  
15 less than a data length necessary for analysis, since a process for  
generating data is performed, data necessary and sufficient for  
analysis is inputted.

Additionally, by storing data obtained by analysis of voices  
of a plurality of persons as the subjects in normal conditions as  
20 the reference values of the individuals in advance, it is possible  
to perform detection on a number of persons as the subjects and to  
perform prompt and accurate detection.

Further, with a recording medium of the present invention,  
by causing a general-purpose computer to read the recording medium,  
25 it is possible to realize an apparatus for detecting fatigue and



## CLAIMS

1. An apparatus for detecting fatigue and doze by voice, comprising a controller capable of performing the following operations:

calculating Lyapunov exponents by chaos analysis of digital data of voices; and

judging a fatigue level and/or a dozing state by comparing the calculated Lyapunov exponents of voices uttered at different points of time.

2. The apparatus for detecting fatigue and doze by voice as set forth in claim 1, further comprising:

a microphone for inputting a voice as a sound signal; and

an analog/digital converting device for converting the sound signal inputted to said microphone into digital data.

3. The apparatus for detecting fatigue and doze by voice as set forth in claim 1, wherein

the calculation of the Lyapunov exponents by said controller is performed by chaos analysis of digital data of sound signals recorded on a recording medium.

4. The apparatus for detecting fatigue and doze by voice as set forth in claim 1, wherein



for causing a computer to detect a fatigue level and/or a dozing state by analysis of voices uttered at different points of time is recorded, including:

program code means for causing a computer to calculate Lyapunov exponents by chaos analysis of digital data of voices; and

program code means for causing a computer to judge a fatigue level and/or a dozing state by comparing the Lyapunov exponents of the voices uttered at different points of time.

8. The recording medium as set forth in claim 7, further including program code means for causing a computer to remove a voiceless part from loaded digital data.

9. The recording medium as set forth in claim 8, further including program code means for causing a computer to generate digital data of a predetermined length from data based on said loaded digital data, in the case where a data length after removing the voiceless part from said loaded digital data is less than the predetermined length.

10. The recording medium as set forth in claim 7, further including:

program code means for causing a computer to store calculation results of the Lyapunov exponents;

program code means for causing a computer to read the stored

Lyapunov exponents; and

program code means for causing a computer to compare the read Lyapunov exponents of voices uttered at different points of time.

11. A computer readable recording medium on which a program for causing a computer to detect a fatigue level and/or a dozing state by analysis of voices uttered at different points of time is recorded, including:

program code means for causing a computer to remove a voiceless part from digital data of voices;

program code means for causing a computer to generate digital data of a predetermined length from data based on loaded digital data, in the case where a data length after removing a voiceless part from said loaded digital data is less than the predetermined length.

program code means for causing a computer to give the loaded data to a chaos analyzing process for calculating Lyapunov exponents by chaos analysis;

program code means for causing a computer to store calculation results of the Lyapunov exponents calculated by said chaos analyzing process;

program code means for causing a computer to read the stored Lyapunov exponents; and

program code means for causing the computer to judge a fatigue level and/or a dozing state by comparing the read Lyapunov

exponents of voices uttered at different points of time.

**F**





FIG. 1

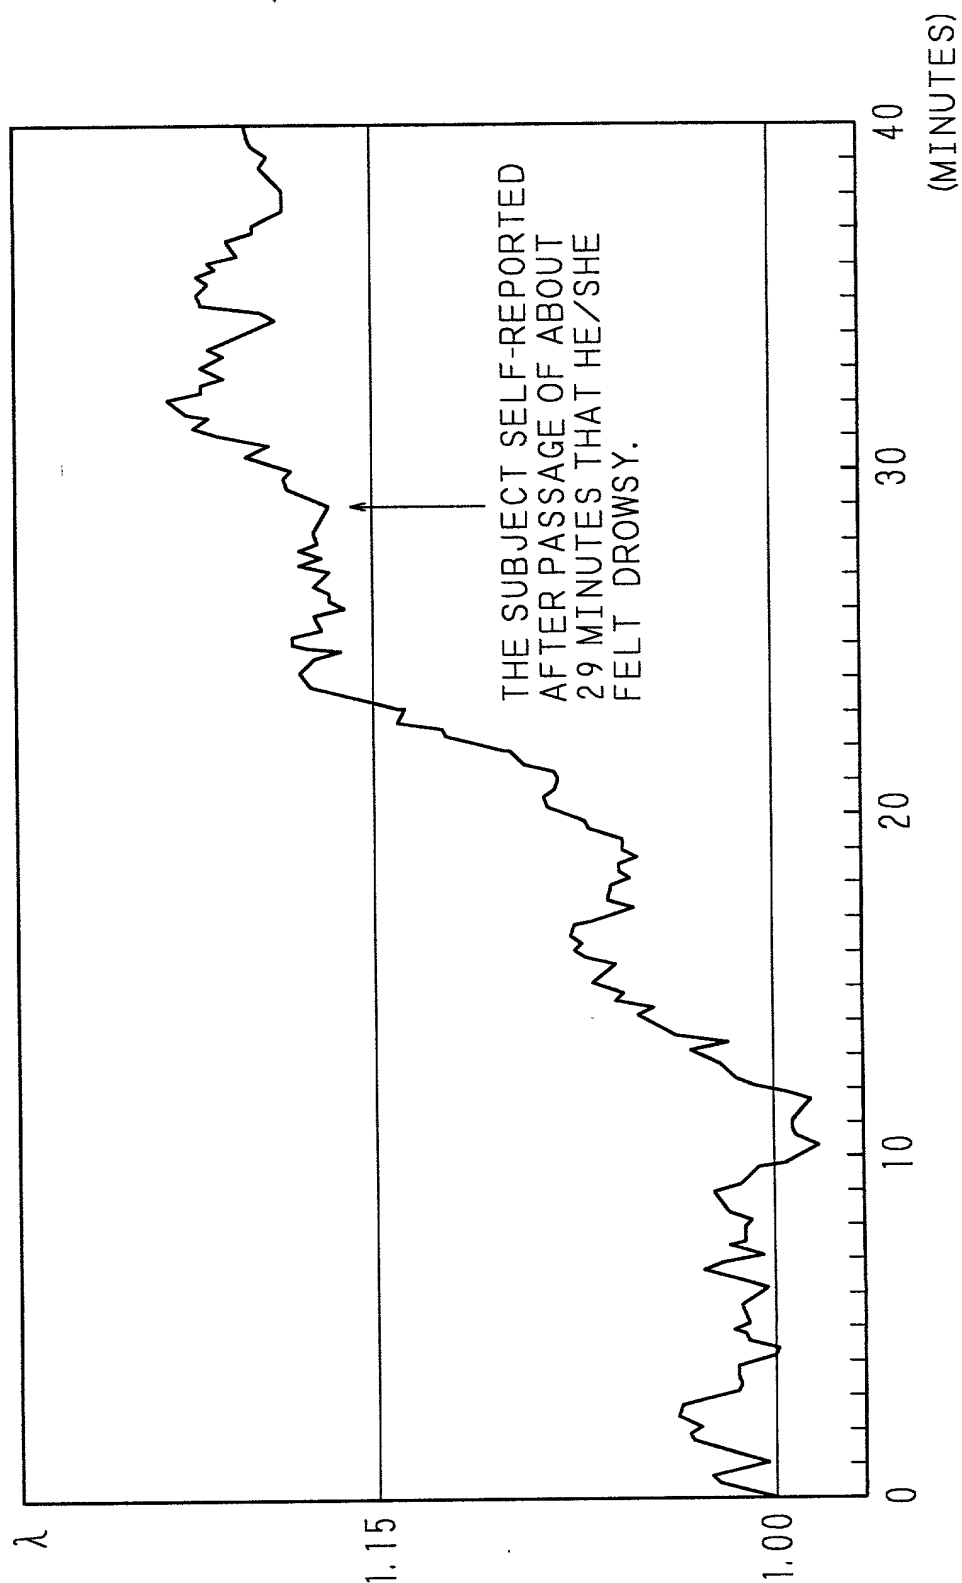


FIG. 2

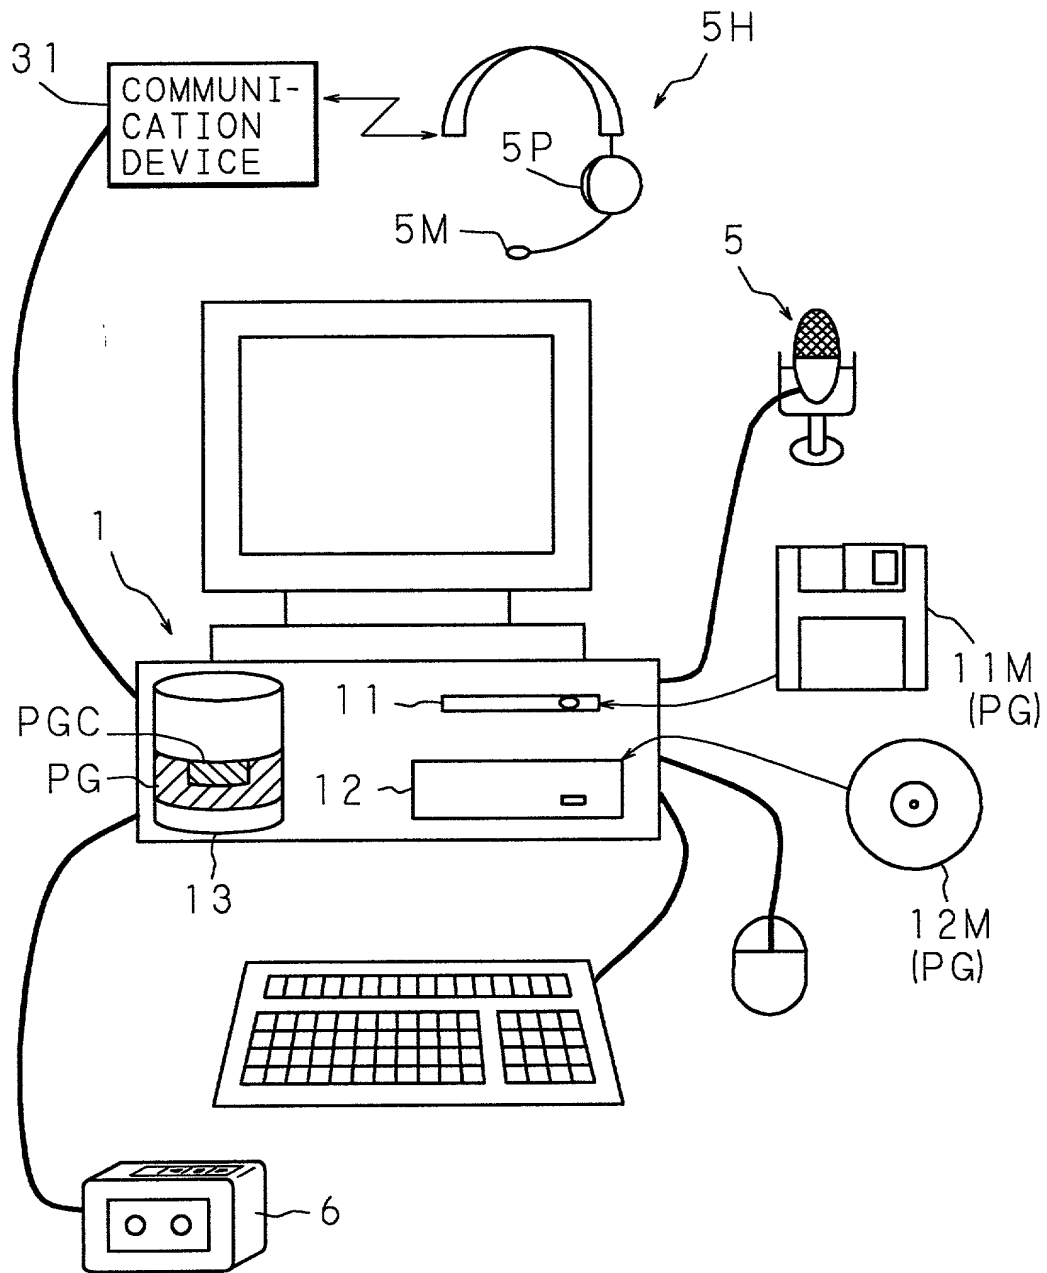


FIG. 3


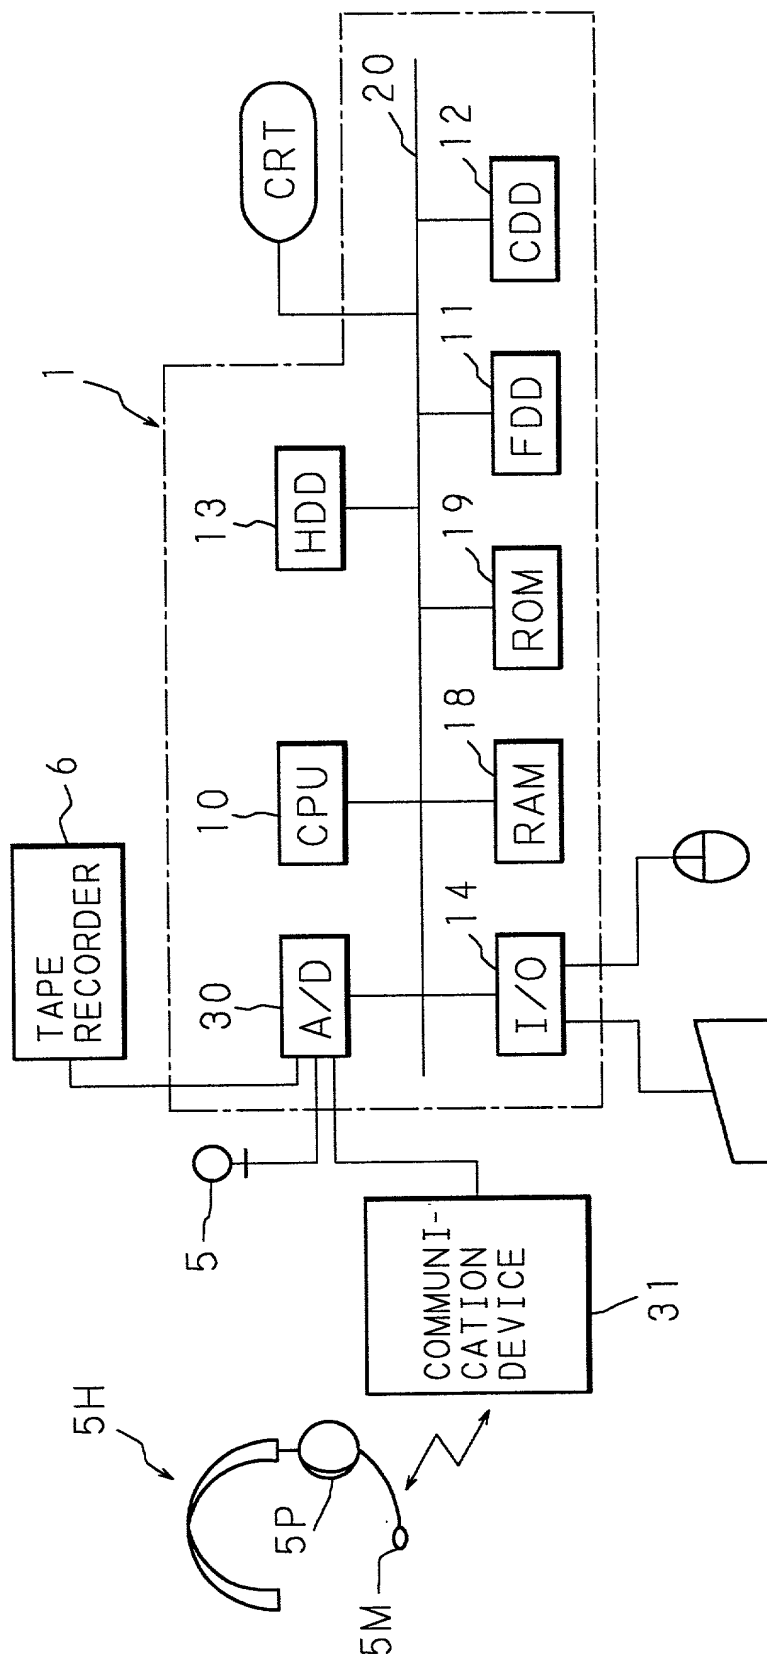


FIG. 4




11M

PC13:	TO REMOVE A VOICELESS PART FROM DATA
PC14:	TO GENERATE DATA, IF NECESSARY
PC15:	TO CALCULATE LYAPUNOV EXPONENTS BY CHAOS ANALYSIS OF DIGITAL DATA (CHAOS ANALYSIS PROCESS)
PC16:	TO STORE CALCULATION RESULTS OF LYAPUNOV EXPONENTS IN HDD 13 OR RAM 18
PC17:	TO READ LYAPUNOV EXPONENTS STORED IN HDD 13 OR RAM 18
PC18:	TO DETERMINE FATIGUE LEVEL AND/OR DOZING STATE BY COMPARING LYAPUNOV EXPONENTS OF VOICES UTTERED AT DIFFERENT POINTS OF TIME
PC19:	TO GIVE ALARM ACCORDING TO RESULT OF DETERMINATION

0969126-101900

FIG. 5

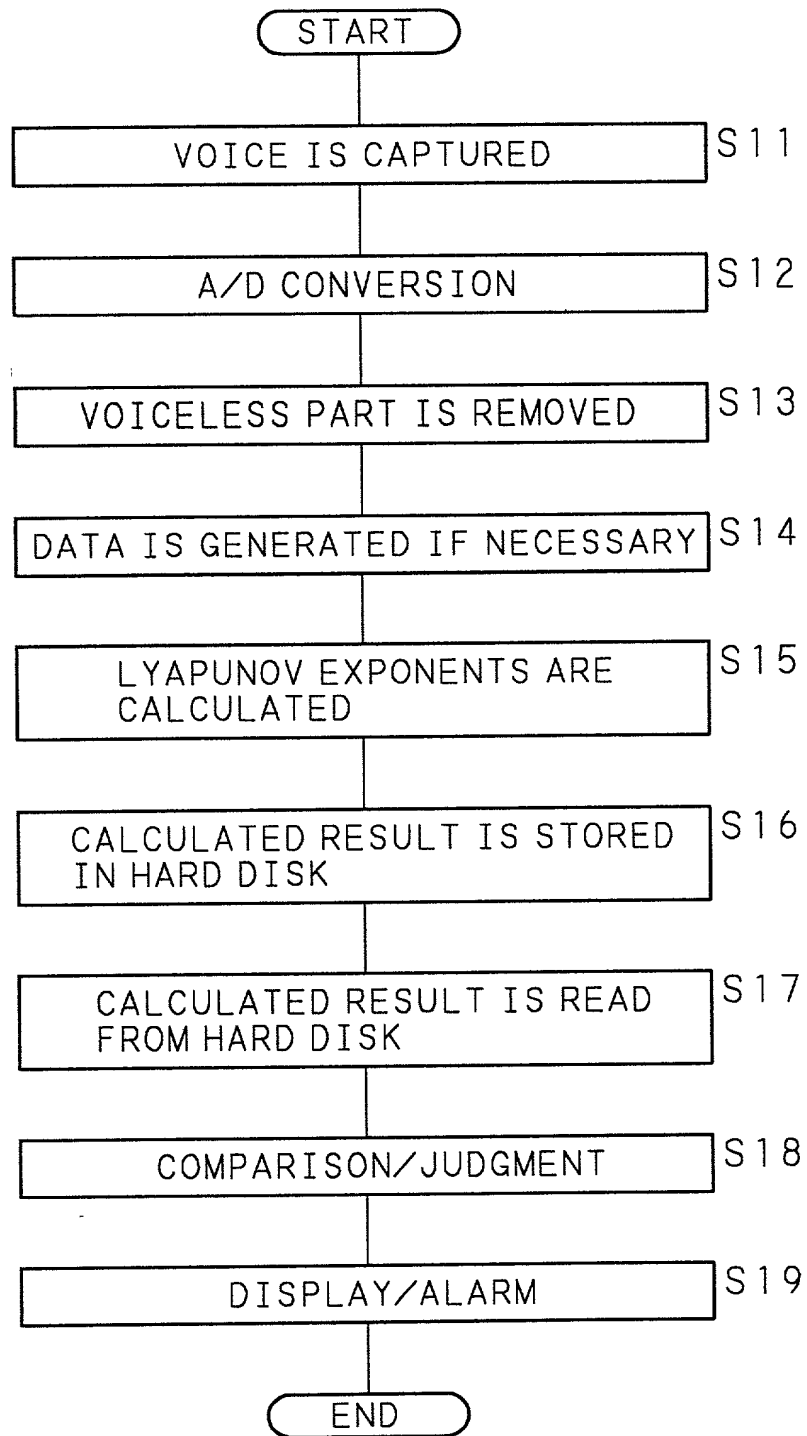

00601" 3276350